



Frame 15

5-7.5 HP (3.73-5.6 kW)



Frame 18

7.5-10 HP (5.6-7.46 kW)



Frame 20

10 HP (7.46 kW)

Benefits You Can Measure:

- **IEEE 519 compliance**
THDi as low as 1%
- **Power factor of 98%**
Less wasted energy
- **Power loss ride-through capability**
No motor dropouts during power transfer
- **Low insertion loss**
Less heat, longer motor life
- **Retrofit ready**
Upgrade to mission-critical AFE in minutes
- **Designed for efficiency and sustainability**
91%+ total system efficiency

Applications



Fans



HVAC



Hospitals

Aircore EC+ with Integrated AFE

Do More With Less.

Integrated AFE

- Incorporates wideband harmonic mitigation using an Active Front End (AFE) technology
- Lowers harmonic content well below IEEE 519 levels across the motor's operating range while maintaining unity power factor further improving system performance limiting insertion losses below 1% at high efficiency
- As an integrated solution, the AFE eliminates additional wiring and infrastructural costs typically associated with passive filters or other solutions

Optimized efficiency and reliability

- Meets highest efficiency standards at a wide range of load conditions
- State-of-the-art VFD allows precise speed control, and reduces energy usage
- Increased operational efficiency by eliminating torque ripple, cogging, stator hysteresis and eddy current losses
- High Resistance Ground (HRG) capability for increased reliability
- Hybrid ceramic bearings for increased longevity

Sustainable solutions

- Maximum power density in a smaller and lighter package
- PCB stator uses 66% less copper and has proven to be 10x more reliable than traditional iron-core, copper-wound stators
- Easy serviceability through our modular design enables the reuse and extended lifespan of components, keeping them out of the landfill




Customize your motor system and instantly generate a tailored datasheet using our Motor Selection Tool (MST).



Preview power, amperage, energy savings, and more.

mst.goinfinitum.com

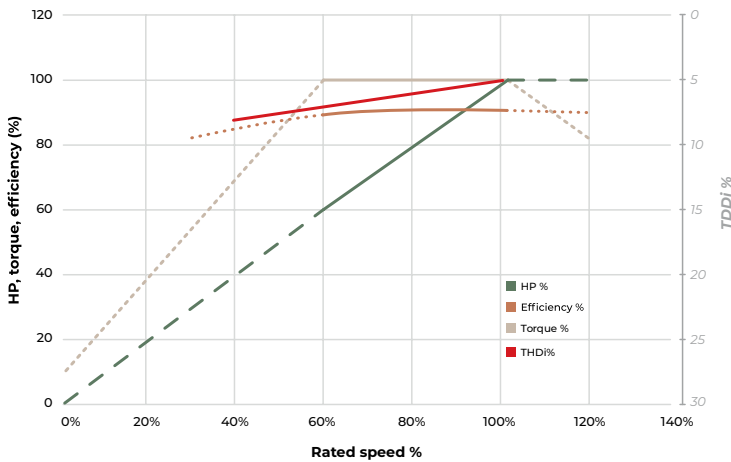Performance


The recommended RPM range for this motor is 360-2160 RPM. Operating below 360 RPM is not advised except during coasting or ramp-up. For operation outside of this recommended range, please contact Infinitum for a customized solution. These curves are for reference only; actual performance may vary.

- Torque (Nm)
- Power
- Efficiency

General Information

Motor Technology	Axial Flux, PCB Stator
VFD Technology	Integrated, SiC based High Efficiency Drives, Active Front End (AFE)
System Efficiency* (Motor + VFD)	90.8% (460 V), 89.4% (415 V)
Rated Speed	1800 to 4200RPM (See Table)
Minimum Speed	100RPM
Maximum Speed	120% Rated
Duty Cycle	Continuous
Service Factor	1.0
Cooling	TEFC
Thermal Protection	Electronically Protected (EP-L)
IP Rating	IP65
Mounting	Peripheral Mount C-Face 182-TC
Mounting Orientation	Horizontal Vertical

*Calculated

Mechanical Information

Rotation	CW, CCW
Bearing (DE & NDE)	6206 Hybrid Ceramic
Grease	Permanent Mobil Polyrex
Rotor Inertia	0.49 kg.m ²
Grounding Brush	Included, DE


Electrical Information

Supply Voltage	415/460 VAC ±10%
Rated Amps*	12.0 A ±10% (460 VAC), 13.0 A ±10% (415 VAC)
Maximum Voltage Imbalance	+/-3% Phase-Phase Voltage
Short Circuit Rating (SCCR)	65kA
Insulation Class	MOT150 Class B
Grounding	Delta, HRG, Grounded Wye
Harmonics	<5% TDDi
Power Factor	0.98

Power, Speed

Frame Size	Rated Torque (Nm)	Rated Power (HP)	Rated Speed (RPM)	Weight (Lbs)
AM20-x	40	10	1800	130
AM18-x	20	10	3600	100
AM18-x	30	10	2400	100
AM18-x	30	7.5	1800	100
AM15-x	22	7.5	2400	86
AM15-x	15	7.5	3600	86
AM15-x	20	5	1800	86
AM15-x	15	5	2400	86

Controls & Communication

Harmonics Mitigation	Included
	MODBUS RTU for I-con (Desktop or Mobile)
Analog Input	0-10V, 4-20mA
Analog Output	0-10V, 4-20mA
Digital Input	4x
Digital Outputs	2x
Relay	125 VAC / 30 VDC
Aux Power	250mA, 24VDC


Ambient Conditions

Ambient Temp (Operation)	-13F to 104F (-25C to 40C) 2% Power Derate per 1C up to 50C
Ambient Temp (Storage)	-40F to 185F (-40 to 85C)
Altitude	0 to 3300 ft. (0-1000M) 9% Power Derate per 1000 M up to 4000 M
Humidity (Operation & Storage)	95% RH, No Condensation
Contamination (Operation & Storage)	No conductive dust



Certifications

UL 1004-7 UL 1004-1 UL 61800-5-1 CSA 22.2 N077 IEEE 519

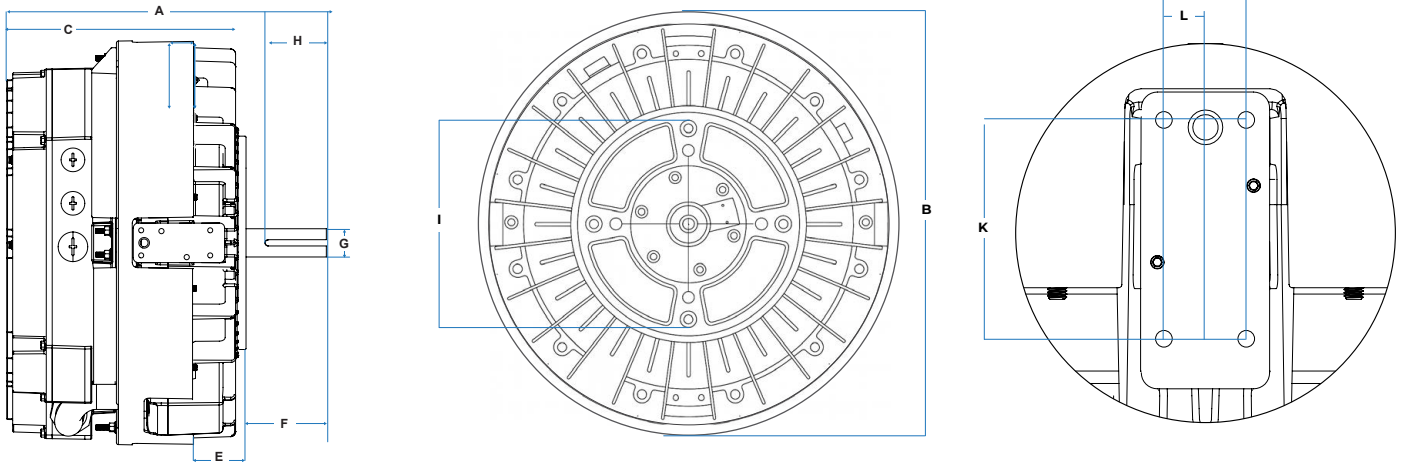

Frame Size	A	B	C	E	F	G	H	I	K	L	M
AM20-X	326.5	537.3	237.3	34.5	82.7	28.6	60.0	184.1	69.9	12.7	25.4
AM18-X	322.0	472.0	233.1	29.4	82.1	28.6	60.0	184.1	69.9	12.7	25.4
AM15-X	324.4	417.3	234.1	36.2	82.3	28.6	60.0	184.1	69.9	12.7	25.4

All measurements in mm

Mounting & dimensions

There are four mounting pad locations.	Each pad is spaced 90° apart, containing 4 mounting holes and one lifting eye hole.	The DE face of the mounting block has threaded holes for four bolts (1/2"-13).	All bolt holes should be used for secure mounting of the motor to equipment
----------------------------------------	-------------------------------------------------------------------------------------	--------------------------------------------------------------------------------	-----------------------------------------------------------------------------

Catalog Number Decoder
AM20-0590-1225-ABAH-AA60 Example

Family	Frame	HP	Rated Speed	Product Code
AM	20	0590	1225	ABAH - AA60
			1 2 3 4	5 6 7 8

Family	Name
AE	Aircore EC+
AM	Aircore EC+ (AFE)

Frame	Motor Diameter
13	Refer to Dimensions
15	Refer to Dimensions
18	Refer to Dimensions
20	Refer to Dimensions

HP	Motor Power
XXXX	(Example) XX.XX
1000	(Example) 10HP
0590	(Example) 5.90HP

List is not exhaustive

Rated Speed	RPM
1225	(Example) 1225 RPM

List is not exhaustive

Product Code

Position 1	Voltage
A	460V 3-phase
C	575V* 3-phase

*Check the Motor Selection Tool (MST) for compatible models.

Product Code

Position 2	Communication
A	MODBUS RTU/Analog
B (Optional)	BACnet MS/TP/Analog

Position 3	VFD
A	All Features

Position 4	Bearings
H	Hybrid Ceramic 6206

Position 5	Shaft
A	L 3.3", D 1.13"
B (Optional)	L 4.0", D 1.13"

Position 6	Cable Harness
A	Default

Position 7	Ingress Protection
6	IP65

Position 8	Miscellaneous
0	Grounded Wye, EP-L
3	Grounded Wye, HRC, Delta, EP-L

 Generate a tailored datasheet using our Motor Selection Tool. mst.goinfinitum.com